

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 December 2001 (06.12.2001)

PCT

(10) International Publication Number
WO 01/93505 A2

(51) International Patent Classification⁷: **H04L 12/28**,
H04Q 7/20, H04L 29/06, H04M 7/00

(21) International Application Number: PCT/CA01/00766

(22) International Filing Date: 24 May 2001 (24.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2,310,188 30 May 2000 (30.05.2000) CA

(71) Applicant (for all designated States except US): **SOMA NETWORKS, INC.** [US/US]; China Wharf Basin, Suite 2000, 185 Berry Street, San Francisco, CA 94107 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SNELGROVE, W., Martin** [CA/CA]; c/o SOMA Networks, Inc., 312 Adelaide Street W., Suite 700, Toronto, Ontario M5V 1R2 (CA). **KSCHISCHANG, Frank** [CA/CA]; c/o SOMA Networks, Inc., 312 Adelaide Street W., Suite

700, Toronto, Ontario M5V 1R2 (CA). **VAN HEESWYK, Frank, M.** [CA/CA]; c/o SOMA Networks, Inc., 312 Adelaide Street W., Suite 700, Toronto, Ontario M5V 1R2 (CA). **MANTHA, Ramesh** [CA/CA]; c/o SOMA Networks, Inc., 312 Adelaide Street W., Suite 700, Toronto, Ontario M5V 1R2 (CA). **FRAZER, Mark, J.** [CA/CA]; c/o SOMA Networks, Inc., 312 Adelaide Street W., Suite 700, Toronto, Ontario M5V 1R2 (CA).


(74) Agents: **STRATTON, Robert, P.** et al.; c/o SOMA Networks, Inc., 312 Adelaide Street W., Suite 700, Toronto, Ontario M5V 1R2 (CA).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

[Continued on next page]

(54) Title: COMMUNICATION STRUCTURE WITH CHANNELS CONFIGURED RESPONSIVE TO RECEPTION QUALITY

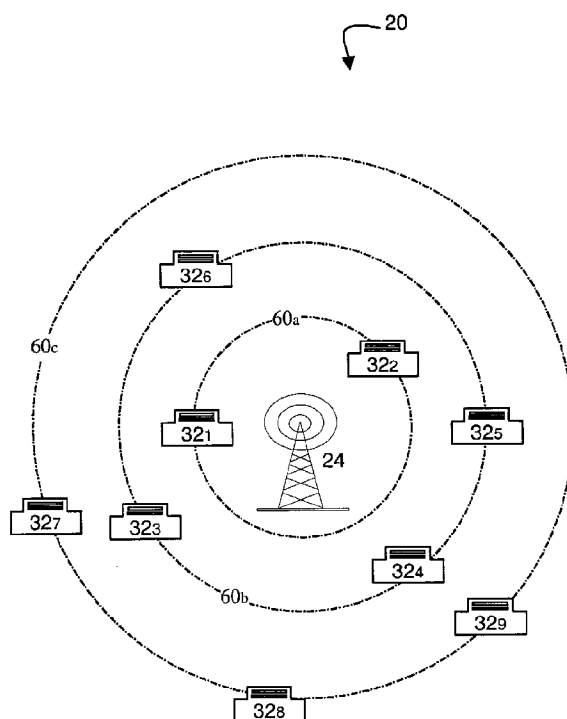

(57) Abstract: A communication structure and method which allows connection-like and connectionless communications to be provided on a multiplexed link is provided. The structure and method can make efficient use of available transmission capacity and/or network resources while providing for both types of communication. Connection-like communications can be provided by a channel having allocated bandwidth dedicated to the communication while connectionless communication can be provided by a shared channel through which data can be transmitted to subscribers. In an embodiment, the shared channel transmits frames of packets addressed to one or more of the subscribers. The frames can have a robustly packaged header that can be received by all subscriber stations serviced by the base station while payload data in the frame can be packaged with a level of robustness appropriate for the intended subscriber station. Different packagings can include different encoding and/or modulation of the payload data. The allocation of bandwidth between the dedicated channels and the broadcast channel can be fixed, or can be managed to meet network or network operator requirements. The structure and method can also be managed by the network operator to permit prioritization of some communications over others. In another embodiment, two or more shared channels are provided. In another embodiment, dedicated channels can be created with different amounts of bandwidth and/or can employ modulation and/or encoding selected according to

the reception quality of the recipient subscriber station.



WO 01/93505 A2



patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*

-1-

Communication Structure With Channels
Configured Responsive to Reception Quality

FIELD OF THE INVENTION

The present invention relates to a communication structure and method. More specifically, the present invention relates to a communication structure and method for transmitting data, which can include both voice data and non-voice, "pure" data, over a multiplexed link, and which includes at least one channel that is configured responsive to reception quality.

BACKGROUND OF THE INVENTION

Many communications systems are known. Early communications systems were connection-based, in that a connection was physically established through the system between the communicating nodes. For example, in the early versions of the public switched telephone network (PSTN), users were provided a point-to-point connection to other users through switchboards, switches and trunks. More recently, the PSTN has employed multiplexed lines that are shared, through at least some part of the network, by multiple users, but which still provide a fixed amount of bandwidth and network capacity to each user for their voice data connection, these bandwidth and network capacities being selected as meeting the anticipated maximum requirements for a common telephone voice conversation, which requirements are typically referred to as toll quality.

Data communications systems for "pure data" (i.e. – data transmissions other than voice) have also been built which are connectionless. Connectionless systems generally operate on a best effort and/or statistical basis to deliver data via a suitable, but not necessarily fixed, route between the users, at best effort transmission rates and/or error rates. An example of a connectionless system is a packet network such as the Internet, which employs the Internet Protocol (IP), and wherein the network capacity is shared amongst the users.

More recently, attempts have been made to combine connectionless and connection-like services on a single communication system. For example, much interest has been expressed recently in Voice over IP (VoIP) through the Internet. However, it has proven difficult and/or costly to create a communication system which can meet both the connection-like requirements of VoIP (voice data requiring a moderate data rate and having some tolerance for errors, but requiring low latency) and connectionless requirements of pure data (often utilizing a high, bursty data rate and having a relatively high tolerance to latency but little tolerance for errors).

Attempts have been made to provide a connection-like mechanism via the Internet.

-2-

One such attempt is the ReSerVaton Protocol (RSVP) implemented by some equipment vendors and which allows network capacity to be “reserved” at routers and switches to establish a “virtual” connection through the Internet to better ensure that desired quality of service (QoS) levels will be met for the virtual connection. However, support for RSVP must explicitly be implemented within
5 user applications and at each switch and/or router involved in the virtual connection, and this has been difficult to achieve to date. Further, there is a significant amount of time and overhead required to set up an RSVP virtual connection which can negate the benefits of an RSVP virtual connection for connections of relatively short duration. Even when employed, RSVP does not typically result in an efficient usage of network capacity as the maximum anticipated bandwidth
10 and/or network capacity requirements must be reserved for the duration of the virtual connection, even if they are not used, or are not used continuously. Thus, in many circumstances, reserved network resources are sitting idle, or are under utilized, for some portion of time. Further, RSVP does not include any incentive mechanism by which applications/users are encouraged to only make effective use of network resources, i.e. – unreasonable requests for resources can be made by a user
15 or application resulting in poor network efficiencies as there are generally no economic or other disincentives for doing so.

Such difficulties are exacerbated when the links on which the network, or a portion of the network, is implemented involve a multiplexed link of expensive and/ or limited bandwidth. In such cases efficient utilization of bandwidth and/or network resources is very important and
20 RSVP or similar strategies have difficulty in meeting desired efficiencies. As used herein, the terms “multiplex” and/or “multiplexed link” are intended to comprise any system or method by which a link is shared to make multiple connections amongst users. Examples of such multiplexed links include wired or wireless links employing multiplexing systems such as TDMA, CDMA, OFDM, FDMA or other arrangements.

25 A specific prior art example of a communication system providing digital voice transmission over a multiplexed wireless link is a PCS (Personal Communication System) cellular system. Such systems can employ a multiplexing technique such as CDMA, TDMA, hybrid systems such as GSM, or other strategies to allow multiple callers to share the wireless link between the cellular base station and the PCS mobile units in both the upstream (mobile to base station) and
30 downstream (base station to mobile) directions. One popular such system is the CDMA-based IS-95 cellular system in use in North America, South Korea and Japan.

While IS-95 based systems, or the like, have been very successful at handling voice

communications, attempts to provide pure data services over such systems have experienced less success. To date, one approach has been that an assignable channel, from a limited set of such channels, must be dedicated to each user to which pure data is to be sent. This does not generally make efficient use of the available IS-95 bandwidth, as data rates and requirements vary much more
5 widely than does a typical voice communication for which the channels were designed.

Other attempts have been made to offer data communication systems which address these problems and which are backward compatible with IS-95, or other standards, but to date no system has been created which provides effective usage of available, limited, bandwidth on a multiplexed link for data transmissions including voice and pure data.

10 It is therefore desired to have a communication structure and method of providing communications, including voice data and pure data, over wireless or other multiple access links.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a novel communication structure and method which includes at least one channel which is configured responsive to
15 reception quality and which obviates or mitigates at least some of the above-identified disadvantages of the prior art.

According to a first aspect of the present invention, there is provided a communications structure for communicating between at least one network node and at least two subscriber stations through a multiple access link, said structure comprising:

20 a plurality of dedicated channels, each dedicated channel having allocated to it a portion of the transmission capacity of said link to provide communication between said network node and one of said at least two subscriber stations; and

a shared channel having allocated to it a portion of the transmission capacity of said link and wherein said shared channel is operable to transmit frames of packets from said
25 network node to said at least two subscriber stations.

According to another aspect of the present invention, there is provided a method of transmitting data from a network node to a plurality of subscriber stations over a multiple access link, comprising the steps of:

(i) determining the requirements for a first data transmission intended for a
30 subscriber station;

(ii) selecting the use of a dedicated channel or a shared channel to effect said first data transmission in accordance with said determined requirements; and

-4-

(iii) if a dedicated channel is selected, obtaining a dedicated channel when available and transmitting said first data transmission thereon and if a shared channel is selected, transmitting said first data transmission on said shared channel in the form of data packets addressed to said subscriber station.

5 According to another aspect of the present invention, there is provided a system for transmitting data comprising:

 a network node having an output device for outputting a signal;

 a plurality of subscriber stations each having an input device and being operable
10 to a receive said signal at a different reception quality than at least one other said subscriber station;

 said signal including a frame having an identifier recoverable by all of said subscriber stations regardless of said reception qualities, and a remaining portion recoverable by at least one of said subscriber stations, said identifier indicating whether said subscriber station need recover said remaining portion.

15 According to yet another aspect of the present invention, there is provided a communications structure for communicating between at least one network node and at least two subscriber stations through a multiple access link, said structure comprising:

 a plurality of dedicated channels, each dedicated channel having allocated to it a portion of the transmission capacity of said link to provide communication between said
20 network node and one of said at least two subscriber stations;

 a shared channel having allocated to it a portion of the transmission capacity of said link and wherein said shared channel is operable to transmit frames of packets from said network node to said at least two subscriber stations; and

 wherein at least one of said dedicated channels or said shared channel employs a
25 modulation and/or encoding method for transmissions to a subscriber station which is selected according to the reception quality of said subscriber station, said modulation and/or encoding method differing from a modulation and/or encoding method for transmissions to another subscriber station with a different reception quality.

 According to yet another aspect of the present invention, there is provided a
30 system for transmitting data comprising:

 a base station;

 a first subscriber station and being operable to a receive a transmitted radio signal

-5-

from said base station at a first reception quality;

at least one additional subscriber station operable to receive said transmitted radio signal at a second reception quality different from said first reception quality;

said base station operable to robustly-package a frame of data over a channel for
5 reception by all of said subscriber stations, wherein a portion of said frame is recoverable by all of said subscriber stations to indicate whether a receiving subscriber station is intended to recover a remaining portion of said frame.

According to yet another aspect of the present invention, there is provided a subscriber station comprising:

10 means for receiving a radio-signal at a reception quality, said radio-signal carrying a frame transmitted from a base station;

means to recover an identifier from said frame regardless of said reception quality, said identifier indicating whether said subscriber station should recover a remaining portion of said frame that is packaged according to said reception quality.

15 According to yet another aspect of the present invention, there is provided a frame for transmission to a plurality of subscriber stations each having a reception quality corresponding to an ability to recover said transmission, said frame comprising:

an identifier packaged for recovery regardless of said reception qualities and including information representing whether a receiving subscriber station is within a range of
20 reception qualities;

a header packaged for recovery by subscriber stations within said range and including address information; and,

at least one payload packet packaged for recovery by subscriber stations in accordance with said address information.

25 According to yet another aspect of the present invention, there is provided a method of packaging a frame for transmission to at least one of a plurality of subscriber stations over a multiple-access link, each of said subscriber stations having a reception quality associated with an ability to receive a transmission over said link, said method comprising the steps of:

receiving and buffering a sufficient amount of data to fill said frame;

30 assembling said data into at least one payload packet addressed to said at least one subscriber station, said at least one payload packet being robustly-packaged according said at least one subscriber station's reception quality;

-6-

assembling an address of said at least one subscriber station into a header packet that is robustly-packaged at least according said at least one subscriber station's reception quality;

assembling an identifier indicating the poorest reception quality of the at least one
5 subscriber stations having said at least one payload packet addressed thereto, said identifier being recoverable by all subscriber stations regardless of said reception qualities;

assembling said payload packets, said header and said class-identifier into a frame; and

transmitting said frame over said link.

10 According to yet another aspect of the present invention, there is provided a method of recovering a frame transmitted from a base station to a plurality of subscriber stations over a multiple-access link, each of said subscriber stations having a reception quality associated with said multiple-access link, said method comprising the steps of:

receiving said transmitted frame;

15 recovering an identifier using a recovery operation corresponding to a lowest reception quality of said subscriber stations;

recovering a header when said identifier indicates that said receiving subscriber station is within a range of reception qualities, said header packet recovered using a recovery operation corresponding to a lowest reception quality indicated by said identifier packet; and

20 recovering payload packets when said header packets indicate that said payload packets are addressed to said receiving subscriber station, said payload packet recovered using a recovery operation corresponding to a reception quality of said receiving subscriber station.

According to yet another aspect of the present invention, there is provided a frame for transmission to a plurality of subscriber stations each having a reception quality
25 corresponding to an ability to recover said transmission, said frame comprising:

an identifier packaged for recovery regardless of said reception qualities and including information representing whether a receiving subscriber station is within a range of reception qualities;

a header packaged for recovery by subscriber stations within said range and
30 including address information; and

at least one payload packet packaged for recovery by subscriber stations in accordance with said address information.

-7-

The present invention provides a communication structure and method to allow connection-like and connectionless communications to be provided on a multiplexed communication link. The structure and method can make efficient use of available transmission capacity and/or network resources while providing both types of communication and channels are configured corresponding to the reception quality of the intended subscriber stations. Connection-like communications can be provided by a dedicated channel having allocated transmission capacity dedicated to the communication while connectionless communication can be provided by a shared channel through which data can be transmitted to subscriber stations. Hybrid or other uses of the shared channel and dedicated channels can also be employed.

The allocation of transmission capacity between the dedicated channels and the shared channel can be fixed, or can be managed to meet network or network operator requirements. The structure and method can also be managed by the network operator to permit prioritization of some communications over others.

In an embodiment, the shared channel transmits frames of packets addressed to the subscriber stations.

In an embodiment, dedicated channels can have different amounts of transmission capacity allocated and they can employ different modulations and/or encoding methods to transmit data to the subscriber station they are allocated to corresponding to the reception quality of the subscriber station they are transmitting to.

Similarly, in an embodiment the shared channel can employ different modulations and/or encodings for packets or frames corresponding to the reception quality of the subscriber stations addressed by the packets.

In an embodiment two or more shared channels can be employed.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the present invention will now be described, by way of example only, with reference to the attached Figures, wherein:

Figure 1 shows a wireless local loop system employing a multiplexed radio link;

Figure 2 shows a prior art communication system;

Figure 3 shows a communication structure in accordance with an embodiment of the present invention;

Figure 4 shows a reception quality service class arrangement in accordance with an embodiment of the present invention;

-8-

Figure 5 shows a data frame for use with a shared channel and reception quality service class structure in accordance with an embodiment of the present invention;

Figures 6a and 6b show the structure of Figure 3 wherein the numbers of dedicated channels are changed to vary the allocation of bandwidth between a shared channel and dedicated
5 channels;

Figure 7a shows an example of the structure of Figure 3 wherein a minimum bandwidth allocation has been defined for the shared channel;

Figure 7b shows the structure of Figure 7a when an additional dedicated channel has been created and the bandwidth of the shared channel has been decreased accordingly;

10 Figure 7c shows the structure of Figure 7a when the shared channel is reduced to its selected minimum level and the remainder of the bandwidth of the system has been allocated to assigned dedicated channels; and

Figure 8 shows the structure of Figure 3 wherein two shared channels are provided.

DETAILED DESCRIPTION OF THE INVENTION

15 Figure 1 shows a wireless local loop (WLL) system, indicated generally at 20. System 20 includes at least one network node, such as base station 24, which is connected to one or more networks, such as the PSTN and/or the Internet, and/or to one or more other base stations 24, via a back haul 28. Backhaul 28 can be any suitable communication link examples of which include, without limitation, T1, T3, E1, E3, OC3, radio or microwave links. Each base
20 station 24 communicates with a plurality of subscriber stations 32 via a multiplexed radio link 52 shared between subscriber stations 32. In Figure 1, each subscriber station 32 can provide simultaneous connections to at least one telephony device 60, such as a telephone set or facsimile machine, and a data device 48 such as a computer, video conferencing system, personal digital assistant, etc.

25 Radio link 52 employs a suitable multiplexing technique, such as TDMA, FDMA, OFDM, CDMA, hybrids thereof or other multiplexing techniques to allow simultaneous use of radio link 52 by base station 24 and more than one subscriber station 32. These multiplexing techniques can be used to "channelize" and/or otherwise share radio link 52.

In prior art systems where, for example, subscriber stations are mobile
30 telephones, a base station can assign the usage of a portion of a radio link to a subscriber station, on an as-needed basis. For example, in a system employing IS-95, the radio link is channelized into sixty-four channels in the downlink direction from the base station to the subscriber station.

Some of these channels are dedicated for control and signaling purposes between the base station and subscriber stations, and the balance form a pool of traffic channels, one or more of which can be assigned as needed, to communicate with a subscriber station.

The IS-95 communication system suffers from certain disadvantages. For example, the channels are of fixed pre-selected data rate (e.g. 9.6 or 14.4 kilobits per second, although different amounts of repetition can be employed, resulting in different effective rates) and use of a traffic channel is reserved for the duration of the connection, even if the connection is not presently using the link resources (bandwidth and/or code space, etc.) allocated to the channel. It is not unusual that a voice conversation includes relatively long pauses wherein no information is transmitted and channel bandwidth is essentially wasted (although in CDMA, this results in a desirable reduction in interference between users).

When connectionless services are considered, this problem is much worse as transmissions of pure data to a data device, such as a computer, can comprise one or only a few packets that typically arrive in bursts, rather than at a steady rate. A channel established for such a connectionless service will therefore typically not use a large part of its allocated link resources, yet these unused resources are reserved for the duration of that connection and are unavailable for use elsewhere in the system until the channel is freed. In addition, there is a relatively significant overhead required to assign a channel between a base station and a subscriber station. Thus, for connectionless services between a base station and a subscriber station, the time and/or network processing requirements for establishing a channel can be unreasonable for short bursts of packets and, in general, do not make efficient use of link resources.

Figure 2 shows a prior art downlink (from base station to users) structure 100 for the radio-link used in IS-95 CDMA systems. Structure 100 represents the bandwidth available which typically is arranged into as many as sixty-four channels. Channels 104, 108 and 112 are control channels used to establish and maintain communications with users. For example, channel 104 can be the IS-95 pilot channel, channel 108 the IS-95 paging channel and channel 112 the IS-95 synchronization channel. Additional or different or fewer control channels can be employed that, for example, are transmitted to all (typically mobile) users. Channels 116₍₁₎ through 116_(x) are the 'x' traffic channels which carry user (non-control) data between base stations and the users. In IS-95A, traffic channels 116 all have the same data rate, while in IS-95B, the data rate of channels 104 through 116_(x) can be varied, resulting in different total

-10-

numbers of channels. It is important to note that structure 100 is essentially part of a connection-based system, in that a traffic channel 116, and its associated resources, are allocated to a user for the duration of a communication and provide a fixed amount of bandwidth, and/or data rate, for the duration of the connection.

5 Figure 3 shows a structure 200 in accordance with an embodiment of the present invention which can be used, for example, as a downlink radio structure with WLL system 20 in Figure 1. In structure 200, some portion 206 of the available bandwidth 204 is allocated to one or more control channels (such as 208, 212 and 216) and the remaining portion 220 of bandwidth 204 is allocated between a shared channel 224 and 'n' dedicated channels, 228₍₁₎
10 through 228_(n). As used herein, the term "bandwidth" is intended to comprise the transmission capacity of a link. Depending upon the multiplexing technique employed on a link and the physical layer of the link, transmission capacity can be allocated to users as frequency bands, spreading code space, time slots, transmission rates or other link resources as will be apparent to those of skill in the art and the term bandwidth is intended to comprise all of these, as
15 appropriate.

As described in more detail below, the bandwidth allocated to shared channel 224 can be increased and the number 'n' of dedicated channels 228 correspondingly decreased, or vice versa, as required.

Shared channel 224 is a broadcast channel in that several, or all, subscriber
20 stations 32 in Figure 1 are capable of receiving data transmitted on it from base station 24 and shared channel 224 typically implements connectionless pure data transmissions to subscriber stations 32. One or more packets of data to be transmitted to a subscriber station 32 from base station 24 are assembled into a transmission frame, often along with packets addressed to other subscriber stations 32. These frames can be assembled at base station 24 from packets received
25 via back haul 28 and/or from packets received at base station 24 from other subscriber stations 32 or can be assembled elsewhere and forwarded to base station 24 via backhaul 28. Each assembled frame is transmitted from base station 24 via shared channel 224, over radio link 52, to subscriber stations 32 and each subscriber station 32 receives the transmitted frame and examines the packets therein to identify those, if any, which are addressed to it. Packets
30 addressed to a subscriber station 32 are then processed accordingly by the addressed subscriber station 32.

In a present embodiment of the invention, a transmission frame is ten

-11-

milliseconds in length and it is intended that the construction and transmission of frames is performed on an on going basis, with a frame being constructed and readied for transmission while the preceding frame is being transmitted.

In an embodiment of the present invention, shared channel 224 is operated such that packets addressed to different subscriber stations 32 can be transmitted with different modulation and/or encoding (including repetition rates, FEC code rates, interleaving, etc.) by base station 24 to make efficient use of bandwidth. Specifically, the ability of a subscriber station 32 to properly receive a signal transmitted to it, hereinafter referred to as the "reception quality" of the signal, is determined. The determination of reception quality is performed in different manners according to the multiplexing technique employed to transmit the signal. For example, in TDMA or FDMA systems, the received signal strength is the determination most often used. In CDMA systems, the ratio of received symbol energy to received interference energy (often expressed as E_s/N_o) can be employed as the relevant determination. In any event, the reception quality of channel 224 at each subscriber station 32, referred to generically herein as the signal to noise ratio (SNR) will vary depending on a variety of factors, including multipath interference (from the presence of nearby buildings, etc.), radio noise (including transmissions by other users or radio noise sources), geographical features, etc. and the distance of the subscriber station 32 from base station 24, as is well understood by those of skill in the art. With distance, typically a signal attenuates as $\frac{1}{r^N}$, where r is the distance between the subscriber station 32 and base station 24, and $N > 1$. In IS-95 CDMA systems, for example, N typically is $3 < N < 5$.

In Figure 4, subscriber stations 32 in WLL system 20 with similar reception qualities are grouped into service classes 60a, 60b and 60c, where each service class 60 corresponds to a predefined range of reception qualities at subscriber stations 32. For example, service class 60a can include subscriber stations 32 with SNR's of 20 to 45db for signals received from base station 24, while service class 60b can include subscriber stations 32 with SNR's of 10 to 20db for signals received from base station 24 and service class 60c can include subscriber stations 32 with SNR's of 0 to 10db, etc. The actual ranges of SNR's included in a service class 60 can also be adjusted where the number of subscriber stations 32 in a service class 60 is otherwise too large or too small. For example, if service class 60b includes one hundred subscriber stations while service class 60a has only ten, the ranges of SNR's defined for service class 60a can be adjusted accordingly, such as to 18 to 45db from 20 to 45db and those

-12-

for service class 60b adjusted to 10 to 18db from 10 to 20db, so that, for example, the number of subscriber stations 32 included in service class 60b is decreased to seventy while the number in service class 60a is increased to forty. This allows for improved latency control and network management in system 20.

5 In the Figure, service class 60a includes subscriber stations 32₁, 32₂ which have the highest reception qualities in system 20 and service class 60b includes subscriber stations 32₃, 32₄, 32₅ and 32₆ which have the next-highest reception qualities and service class 60c includes subscriber stations 32₇, 32₈ and 32₉ which have the lowest reception qualities. While service classes 60 and subscriber stations 32 are shown concentrically expanding about base
10 station 24, as mentioned above the actual physical locations of subscriber stations 32 need not correspond to their distance from base station 24 and their positions in this Figure merely reflect their respective reception qualities.

 In any event, as illustrated in Figure 4, subscriber station 32₈ will receive shared channel 224 at a lower reception quality than subscriber station 32₄, and subscriber station 32₄
15 will in turn receive shared channel 224 at a lower reception quality than subscriber station 32₂, but at a better reception quality than subscriber station 32₈. As will be described below in more detail, data to be transmitted to a subscriber station 32 is packaged for transmission according to the service class 60 the subscriber station 32 is presently in.

 It is contemplated that, in most actual implementations, each subscriber station 32
20 may transition between different service classes 60 at different times, depending on such factors as weather and/or local noise created by other electrical devices located proximal to the subscriber station 32, etc. Accordingly, at appropriate intervals or predetermined events, each subscriber station 32 will report its present reception quality to base station 24. Base station 24 operates to maintain a database of the latest reported reception qualities and from time to time
25 regroups subscriber stations 32 appropriately into service classes 60 according to the predefined range of reception qualities defined for each service class 60.

 As used herein, the terms "package", "packaged" and "packaging" refer to the overall arrangement of the transmission of the packaged data for its reception at an intended destination. Packaging of data can include, without limitation, applying different levels of
30 forward error correcting (FEC) codes (from no coding, to high levels of coding and/or different coding methods), employing different transmissions rates, employing different modulation schemes (QPSK, 16-QAM, 64-QAM, 256-QAM, etc.), symbol repetition rates, and any other

-13-

techniques or methods for arranging data transmission with a selection of the amount of radio, or other physical layer, resources required, the effective data rate and probability of transmission errors which are appropriate for the transmission.

For example, a packet of data can be packaged with rate 1/4 coding (i.e. – four
5 bits are sent for each one data bit) and 64-QAM modulation for transmission to a first intended receiver in one service class and another packet can be packaged with rate 1/2 coding (i.e. – two bits are sent for each one data bit) and 256-QAM modulation for transmission to a second intended receiver which has a better reception quality than the first and is in a different service class. In addition, different amounts of puncturing (removing some redundant coded bits) can be
10 performed to obtain different codes rates and yield a desired packaging.

Referring now to Figure 5, a frame for transmission over shared channel 224 is indicated generally at 150. In a presently preferred embodiment, frame 150 is constructed to require 10 milliseconds of transmission time, although longer or shorter transmission times for frame 150 can be selected if desired. As understood by those of skill in the art, frame 150 can be
15 measured in terms of a duration of time and that duration can carry a given number of symbols for transmission to yield a bit rate. In turn, those symbols can represent data, the actual amount of data being represented by a symbol depending on how the data is packaged into a symbol, and data is packaged using a combination of modulation, repetition and encoding to yield an effective transmitted data rate. Thus, it will be appreciated that, while the symbol rate for a
20 frame can remain constant, the effective transmitted data rate of a frame will depend on the packaging of the data. For example, a transmission with a 9600 kilobit per second symbol rate can yield effective data transmission rates of 4800, 2400 or less depending upon the amount of FEC coding, puncturing, repetition and/or the modulation technique applied. Further, as the modulation of packets within a frame can change, the effective data transmission rate can further
25 vary within a frame 150. The application of these concepts to the present invention will be discussed in greater detail below.

Frame 150 includes a service class (or reception quality) packet 154, a header packet 156 and a plurality of payload packets 158₁... 158_x. As mentioned above, depending upon the packaging of payload packets 158, the quantity 'x' of payload packets 158 in frame 150
30 can vary, and the factors affecting this variation will be discussed in greater detail further below.

Service class packet 154 is composed of a destination-service class identifier field 160 and a frame-length field 162. It is presently preferred that destination-service class field 160

-14-

is about two bits in length (allowing four service classes to be defined) and frame-length field 162 is ten bits in length. Destination-service class field 160 identifies the service class 60 with the lowest reception quality from base station 24 for which the frame 150 contains at least one payload packet 158 destined for a subscriber station 32 resident in that service class. This indicates the 'worst case' reception quality that the frame 150 is intended to transmit data to. For example, a frame 150 with a destination-service class identifier field 160 corresponding to service class 60b can include payload packets for subscriber stations 32₃, 32₄, 32₅ or 32₆, or for 32₁ or 32₂, but not for 32₇, 32₈ or 32₉. Frame length field 162 contains the value 'x', to indicate the number of payload packets 158₁, 158₂ ... 158_x in frame 150.

Unlike payload packets 158, destination service class field 160 and frame-length field 162 are always packaged into service class packet 154 in a robust manner to ensure a very high probability of recovery by all subscriber stations 32₁ ... 32_n when frame 150 is transmitted over shared channel 224. Such robust packaging is intended to allow every subscriber station 32 served by base station 24 to recover fields 160 and 162. In the present embodiment, the robustness of service class packet 154 is achieved in the following manner: fields 160 and 162 undergo a forward error correction (FEC) operation 164 and then undergo a modulation operation 166 prior to their insertion into service class packet 154. The type of forward error correction operation 164 and modulation operation 166 are selected based on the needs of subscriber station 32_n (i.e. – the subscriber station 32 with the expected poorest reception quality) located in the service class 60 indicated in destination service class packet 160.

For example, if shared channel 224 employs CDMA multiple access technology, it is presently preferred that where a subscriber station 32 has an E_b/N_0 level of 3db, then a suitable forward error correction operation 164 will be rate 1/2 coding and modulation operation 166 will be 4-QAM (i.e. - QPSK). An appropriate combination of forward error correction operation 164 and modulation operation 166 will not only assist and/or assure the recovery of service class packet 154 by subscriber station 32_n, but that the remaining subscriber stations 32 serviced by base station 24 can also recover service class packet 154. Suitable forward error correction operations 164 and modulation operations 166 for a given subscriber station 32_n having a given reception quality can be determined in a variety of manners, including empirically, as will occur to those of skill in the art and these determined packaging arrangements can be stored in base station 24, or elsewhere in system 20, as appropriate. As will be apparent to those of skill in the art, in some circumstances lower modulation rates (e.g. 64-

-15-

QAM instead of 256-QAM) can be employed with lower coding rates ($3/4$ instead of $1/2$) or vice versa and the present invention is not limited to any particular set of packagings.

Appendix I shows a table of a set of packagings which could be employed for frame 150 in a CDMA system according to various reception qualities (SNRs). Column 1, labeled E_c/N_o , is an SNR measurement that indicates the energy per chip per a given noise level as experienced by a given subscriber station 32. Column 2, labeled Spreading Factor, indicates the number of chips per symbol. Column 3, labeled Modulation Symbols, indicates the modulation operation (4-QAM, 16-QAM, 64-QAM or 256-QAM) used in the packaging of the data. Column 4, labeled Coded Bits/Symbol, indicates the number of bits per symbol after undergoing the modulation operation of Column 3. Column 5, labeled Code Rate, indicates the resulting information bit rate resulting from the coding operation, including the effects of any selected level of puncturing used in the packaging of the data. Column 6, labeled Symbol Repetition Factor, indicates the factor by which symbols are repeated, to further package the data for robust recovery. Column 7, labeled Bits/Symbol, indicates the effective number of bits per symbol. Column 8, labeled Bits/Frame, indicates the effective bits per frame assuming all bits in the frame are packaged according to the modulation rate, coding rate and using the symbol repetition factor shown in the same row and the frame having a ten millisecond duration. Column 9, labeled E_s/N_o , is an SNR measurement that indicates the energy per symbol per a given noise level, for a 10^{-3} Packet Error Rate (assuming 500 bit packets) as experienced by a given subscriber station 32. Column 10, labeled E_b/N_o , is an SNR measurement that indicates the energy per bit per a given noise level. It will be understood by those of skill in the art that columns 1, 9 and 10 bear a fixed relationship to each other.

Returning now to Figure 5, header packet 156 contains a plurality of identifier-fields $167_1 \dots 167_x$, which contain identifying information about each corresponding payload packet $158_1, 158_2 \dots 158_x$. In a present embodiment, identifier fields 167 include an address field 168, a format field 170 and a length field 172. Address field 168_x indicates which of the destination subscriber stations 32_x is intended to receive the respective payload packet 158_x . Format field 170_x indicates the modulation, encoding, etc. used to package the respective payload packet 158_x , the details of which will be discussed in greater detail below. Length field 172_x indicates the length of the respective payload packet 158_x . Header packet 156 also contains a CRC packet 174, which can be used by each subscriber station $32a, 32b \dots 32n$ to determine whether it has correctly received header packet 156. Flush-bits 176 are added to complete the

-16-

encoded sequence to the format required by the complementary decoding operation at the subscriber station 32.

It is presently preferred that each address-data field 168 is twelve bits in length, that each format-data field 170 is four bits in length, that each length-data field 172 is twelve bits in length, that CRC field 174 is eight bits in length, and that flush-bits 176 are eight bits in length. However, other lengths can be employed to suit particular requirements, as will occur to those of skill in the art.

Identifier-fields $167_1 \dots 167_x$, CRC packet 174 and flush-bits 176 are packaged into header packet 156 in a suitably robust manner to ensure a high probability of recovery by all subscriber stations 32 that are located in the service class indicated in destination-service class field 160. In other words, if destination-service class field 160 indicates service class 60b, then the contents of header packet 156 are packaged for robust recovery by all subscriber stations 32 in service classes 60a and 60b, but stations 32_7 , 32_8 and 32_9 in service class 60c may not be able to correctly receive header packet 156.

In the present embodiment, the robust packaging of header packet 156 is achieved in the following manner: identifier fields 167, CRC packet 174 and flush-bits 176 undergo an encoding operation 180 and then undergo a modulation operation 182 to form header packet 156. The forward encoding operation 180 and modulation operation 182 are selected based on the reception quality needed to recover header packet 156 by the subscriber stations 32 located in the service class identified by destination-service class packet 160. It is presently preferred that encoding operation 180 is rate 1/3 convolutional encoding, and that modulation operation 182 is M-ary QAM, where M can be 4, 16, 64, etc. Suitable selections of encoding operations 180 and modulation operations 182 for ranges of reception qualities can be determined in a variety of manners, including empirically, as will occur to those of skill in the art.

Each payload packet 158 is composed of one or more data packets 184 and flush bits 186. Each payload packet 158 is destined for one or more subscriber stations 32 in the service class specified in destination-service class packet 160 and any subscriber stations in higher (better reception quality) service classes. Data packets 184 can be any type of data received at base station 24. For example, data packets 184 can be TCP/IP packets, or segments or aggregations thereof, where it is desired to transmit IP packets to a subscriber station 32. Data packets 184 can be specifically addressed to a particular subscriber stations $32_a, 32_b \dots 32_n$ each of which has its own unique address and/or one or more multicast addresses, to address

-17-

multiple subscriber stations 32, can be defined.

Data packets 184 can be of any length and data to be placed into data packets 184 can be aggregated or segmented, as need, to an appropriate size. Generally, a data packet 184 can include a portion of one, or one or more packets intended for a single subscriber station 32.

5 Flush bits 186, which in a present embodiment are eight bits in length, are added to the end of data packets 184 in order to complete the encoded sequence to the format required by the complementary decoding operation at the subscriber station 32.

Each data packet 184, and its corresponding set of flush bits 186, is packaged into a respective payload packet $158_1, 158_2 \dots 158_x$. This packaging is performed in a suitably robust
10 manner, according to the formatting specified in the format field 170 respective to its payload packet 158. This packaging ensures a high probability of recovery by the destination subscriber station 32. As will be apparent to those of skill in the art, other subscriber stations 32 that have reception qualities equal to or better than destination subscriber station 32, can also recover the payload packet 158, but in general, such recovery will not be performed, and appropriate security
15 measures can be employed to prevent eavesdropping. For example, if a frame 150 includes a destination service class field 160 defining a transmission to service class 60b and includes a payload packet 158 destined for subscriber station 32_3 , then the payload packet 158 will be packaged such that it is recoverable by subscriber stations 32_1 through 32_6 .

The specific forward encoding operation 188 and modulation operation 190 are
20 selected based on the reception quality at the subscriber station 32 located in the service class 60 identified by the address-data field 168 corresponding to the payload packet 158. It is presently preferred that encoding operation 188 is 1/N convolutional encoding (where $N > 2$) and that modulation operation 190 is "M-ary QAM" (where $M = 4, 16, 64, 128$ or 256) but in any event, N and M are selected appropriately for the reception quality in the service class 60 indicated by
25 format field 170.

It is contemplated that, overall, the encoding operation 188 and/or the modulation operation 190 and/or other robust packaging can be commonly or individually selected for each payload packet 158 in a single frame 150. For example, where there are a wide range of reception qualities for subscriber stations 32 within a particular service class 60, then a common
30 modulation operation 190 can be used for each subscriber station 32 within that particular service class 60, but a different encoding operation 188 can be used to accommodate the range of reception qualities within the service class 60.

-18-

The selection of encoding operations 188 and/or modulation operations 190 and/or other robust packaging for each payload packet 158 within frame 150 can depend on the actual application and/or type of data being carried over shared channel 224. (As the application and/or type of data may have different requirements to achieve the required probability of packet error.) For example, a file transfer transmission using the file transfer protocol (ftp) has a low tolerance to errors compared to a voice over IP (VOIP) connection. Thus payload packets 158 transmitted to a first subscriber station 32₃ in service class 60b for an ftp transfer can be encoded with rate 1/4 convolutional coding while payload packets 158 sent to another subscriber station 32₆ in service class 60b, but for a VOIP connection, can be coded with rate 1/2 convolutional coding.

As will be apparent to those of skill in the art, when an encoding operation 188 and modulation operation 190 are selected for a service class, for example service class 60b, payload packets 158 intended for subscriber stations 32 in higher service classes, (i.e. - service classes containing subscriber stations 32 with higher reception quality levels - such as service class 60a), can also be included in frame 150 if desired, although such payload packets 158 intended for higher service classes 60 will be packaged with a superfluous level of robustness for their intended destination.

It is contemplated that the present invention can be particularly suitable for carrying conferencing data, either voice or video, as one or more payload packets 158 within a frame 150 can be addressed (by, for example, including addressing information that indicates all subscriber stations 32 within the cell that should recover the payload packet 158) for recovery by a plurality of subscriber stations 32 participating in the conference. In such a case, payload packets 158 can contain conferencing data and the corresponding address field 170 will contain a broadcast/multicast address appropriate to the intended destination subscriber stations. It will be now apparent that data can be robustly-packaged to obtain a high probability of recovery by subscriber stations at some intermediate level of reception quality, allowing for some acceptable level of reception error of payload data 158 by subscriber stations having a lower level of reception quality, but a high probability of recovery by subscriber stations at a higher level of reception quality.

While the embodiments discussed herein are directed to certain exemplary implementations of the invention, it will be understood that combinations, sub-sets and variations of the embodiments are within the scope of the invention. For example, data packets

-19-

184 received via backhaul 56 or from other subscriber stations 32 can be buffered in base station 24 to organize 150 frames in any desired fashion, such as grouping packets into frames 150 intended for individual ones of service classes 60a, 60b or 60c.

5 Buffering of data packets 184 in base station 24 can also allow the selection of frame size (i.e. the amount of symbols within a frame of a given predetermined time-length), as the amount of modulation and/or encoding and/or forward error correction actually needed to assemble each packet in the frame can be selected as desired.

It is contemplated that various methods can be used to determine the format of robust packaging (i.e. modulation and/or encoding) used to package packets within frame 150. For example, each subscriber station 32 can report its reception quality (either as an exact measurement or by indicating the service class 60 in which the subscriber station 32 is currently included) to base station 24. In turn, payload packets 158 can be packaged (i.e. encoded and/or modulated) according to a predetermined format, known to both base station 24 and subscriber stations 32, according to the reported reception quality. In this manner, base station 24 need not provide format field 170 to each subscriber station 32, as the subscriber station 32 can simply decode the relevant payload packet 158 according to the predetermined format. In the foregoing scenario, it will thus be apparent that format fields 170 can be eliminated in such a case.

Alternatively, format fields 170 can be included within frame 150 which further incorporates at least a control-bit to indicate that the payload packet 158 addressed to a given subscriber station 32 is packaged according to a predetermined format based on a subscriber station's 32 reception quality, or the control-bit can indicate that the payload packet 158 is packaged according to some other format, which is indicated in the following bits within the format field 170. For example, if the first bit of format field 170 is a "0", this can indicate that the payload packet is encoded with a predefined packaging for the last reported reception quality of the subscriber station 32. In such a case, the length of format field 170 is one bit. If the first bit of format field 170 is a "1", then the remaining bits indicate that particular packaging employed for the payload packet 158.

It is also contemplated that format fields 170 can be eliminated, as the format of robust packaging can be determined by receiving subscriber stations 32 using "blind detection", i.e. - a receiving subscriber station 32 can simply attempt to decode a payload packet 158 at various arrangements of demodulation and decoding until the data packets 158 are meaningfully recovered. Other combinations and variations for choosing and detecting the type of robust

-20-

packaging will now be apparent to those of skill in the art.

Referring again to Figure 3, it is intended that each subscriber station 32 will continuously listen for and receive shared channel 224 and thus the time and/or network overhead processing requirements which would otherwise be required to establish a connection to a subscriber station 32 is avoided after a subscriber station 32 is in a normal operating mode (achieved as part of the normal power-up of each subscriber station 32). In this manner, even small amounts of data (such as single packets) can be transferred from base station 24 to subscriber stations 32 in an efficient manner as no setup is specifically required for transmission of a packet to a subscriber station 32 and no reservation of bandwidth is required.

For connection-like services, such as voice communication or other services which have QoS requirements such as relatively low latency or other communications requiring known transmission characteristics, a dedicated channel 228 can be established, as needed, between base station 24 and a subscriber station 32. Dedicated channels 228 can be similar to the traffic channels of IS-95 and have a fixed data rate, or they can be allocated to provide different data rates as desired to, for example, enable voice communication at different qualities, e.g. toll level quality (at 16 kilobits per second (kbps) versus CD-Audio level quality (at 128 kbps). In any case, dedicated channels 228 effectively reserve link resources to provide connection-like service levels for a connection between base station 24 and a subscriber station 32.

It is also contemplated that hybrid connections can be established which employ both shared channel 224 and one or more dedicated channels 228. For example, a connection which has a relatively fixed 'normal' data rate and requires low latency, but which also experiences infrequent bursts to a higher data rate, can be assigned a dedicated channel 228 sufficient for transmitting at the 'normal' data rate and any bursts can be transmitted by shared channel 224 and addressed to the appropriate subscriber station 32.

Alternatively, shared channel 224 can be used to implement both connection-like and connectionless services. In any event, the present invention is not limited to dedicated channels 228 providing connection-like services or shared channels 224 providing connectionless services and many suitable strategies for advantageously employing the structure of the present invention will occur to those of skill in the art.

In an embodiment of the present invention, one or more dedicated channels 228 can be allocated with different amounts of bandwidth and can employ different modulation

-21-

and/or encoding schemes to improve the efficiency with which they use bandwidth. Much like the above described shared channel, in this embodiment a dedicated channel 228 can format and transmit data between base station 24 and a subscriber station 32 with modulation and encoding methods that are selected according to the reception quality of the subscriber station 32 to which the dedicated channel 228 is to be allocated.

If dedicated channels 228 are created with a fixed amount of bandwidth, then allocation of a dedicated channel 228 to a subscriber station 32 can be accomplished in a variety of manners, including the transmission of configuration information over one of control channels 208, 212, 216, etc. which informs the subscriber station 32 of the modulation and/or encoding to be employed on the dedicated channel 228. An alternative method of allocating a dedicated channel 228 to a subscriber station 32 is by transmission of a robustly packaged initialization message from base station 24 to the subscriber station 32 which informs the subscriber station 32 of the modulation and/or encoding to be employed on subsequent transmissions on the dedicated channel 228. In such as case, the robust packaging of the initialization message is pre-agreed for dedicated channels 228, so that subscriber station 32 can decode it.

If the dedicated channels 228 are created with variable amounts of bandwidth, then allocation is performed and subscriber station 32 informed via one or more of control channels 208, 212, 216, etc. of the setup details of channel 228 and then either of the above-mentioned methods, or any other suitable method as will occur to those of skill in the art, can be employed to establish the modulation and/or encoding used for the dedicated channel 228.

As mentioned above, bandwidth portion 220 is managed to allocate bandwidth between shared channel 224 and dedicated channels 228. For example, in Figure 6a bandwidth portion 220, which could be enough bandwidth for fifty-four IS-95A traffic channels (fifty-four times ninety-six hundred kbps equals five-hundred and eighteen-point-four kbps), has been allocated to create forty-one dedicated channels 228 of ninety-six-hundred kbps (three-hundred and ninety-three-point-six kbps in total) and to allocate the balance of bandwidth portion 220 (one-hundred and twenty-four-point-eight kbps), to shared channel 224. In Figure 6b, only eighteen dedicated channels 228 have been allocated (eighteen times ninety-six-hundred kbps equals one-hundred and seventy-two-point-eight kbps) and the balance (three-hundred and forty-five-point-six kbps) has been allocated to shared channel 224.

While structure 200 can be configured with a fixed amount of bandwidth

-22-

allocated to shared channel 224 and remaining bandwidth allocated to a fixed number of dedicated channels 228, it is contemplated that bandwidth portion 220 will be actively managed in many circumstances. By actively managing the allocation of bandwidth portion 220 between shared channel 224 and dedicated channels 228, the operator of structure 200 can meet goals
5 appropriate to the needs of their users and/or make efficient use of the bandwidth available to them. For example, an operator can decide to prioritize providing dedicated channels 228 for voice communications over providing higher data rates on shared channel 224.

It is contemplated that in actively managing bandwidth portion 220, a minimum bandwidth allocation will be selected for shared channel 224, for example bandwidth equivalent
10 to a data rate of fifty kbps at the average packaging being used. This minimum allocation can be selected by an operator according to the service commitments shared channel 224 must meet and the number of subscriber stations 32 that channel 224 must serve. Shared channel 224 is then always allocated at least this selected minimum amount of bandwidth.

It is further contemplated that bandwidth for a selected minimum number of
15 dedicated channels 228, for example five, will also always be allocated. The remainder of bandwidth portion 220 will then be allocated to shared channel 224. When some portion of this remainder of bandwidth is subsequently required to create additional dedicated channels 228, the required bandwidth is de-allocated from shared channel 224 and allocated to the new dedicated channel(s) 228, provided that shared channel 224 is still allocated at least the selected minimum
20 amount of bandwidth. Otherwise, the capacity of structure 200 is exceeded and the creation of further dedicated channels 228 is inhibited.

In addition to the selected minimum number of dedicated channels 228, it is contemplated that a pool of a selected number of dedicated channels 228 (a "channel pool") will be allocated in anticipation of future needs. The dedicated channels 228 in the channel pool are
25 allocated bandwidth but are not initially assigned to any subscriber station 32. When a new dedicated channel 228 is required by a subscriber station 32, it is assigned one of the dedicated channels 228 in the channel pool, thus avoiding the delay resulting from the reallocation of bandwidth from shared channel 224 to create a new dedicated channel 228.

Assuming additional bandwidth can be reallocated from shared channel 224, then
30 a replacement dedicated channel 228 will be created and placed in the channel pool. If bandwidth cannot be reallocated from shared channel 224, (because, for example, it is at the selected minimum bandwidth), then the channel pool is decreased in the number of channels

-23-

until an occupied dedicated channel 228 can be freed-up and returned to the channel pool.

When the channel pool contains the selected number of dedicated channels 228, then bandwidth allocated to additional dedicated channels that are no longer required for subscriber use can be reallocated to shared channel 224. It is also contemplated that the channel pool can be managed such that both a minimum and maximum number of channels can be specified for the pool, i.e. – the size of the pool can be as small as five channels, before replacement channels are added to the pool and as many as eight channels can be in the pool before bandwidth is reallocated to shared channel 224.

It is contemplated that a variety of other management strategies and/or refinements to the strategies mentioned above will occur to those of skill in the art. For example, no channel pool need be established if the overhead delay required to create a dedicated channel 228 can be tolerated.

Figure 7a shows a configuration of structure 200 wherein shared channel 224 has a defined minimum size (indicated in heavy solid line) but has been allocated additional bandwidth (as indicated in thin solid line). Further, in this configuration structure 200 has a channel pool of two dedicated channels 228_(a) and 228_(b) and four dedicated channels 228₍₁₎ through 228₍₄₎ assigned to subscriber stations 32. As shown, if another channel 228_(n) is to be created, it will be allocated bandwidth from shared channel 224, which is then resized accordingly.

As shown in Figure 7b, when another dedicated channel 228 is required to be assigned to a subscriber, in addition to channels 228₍₁₎ through 228₍₄₎, channel 228_(a) (in this example) will be assigned as the required channel as channel 228₍₅₎, a replacement dedicated channel 228_(a) will be created and placed in the channel pool to replace the assigned channel and the bandwidth allocated to shared channel 224 will be correspondingly decreased.

As the capacity of structure 200 is approached, and shared channel 224 is reduced to its defined minimum bandwidth, unused dedicated channels 228_(a) and 228_(b) (as channels 228_(n) and 228_(n-1) in the Figure) will be assigned to subscribers, as required, and no new dedicated channels 228 will be created, allowing the channel pool to become empty, as shown in Figure 7c.

It is also contemplated that more than one shared channel 224 can be provided, if desired, in bandwidth portion 220. In such a case, as shown in Figure 8, each shared channel 224a and 224b will result in corresponding decreases in bandwidth available to dedicated

-24-

channels 228 or other shared channels 224. As shown, broadcast channels 224a and 224b can have different amounts of bandwidth allocated to them. The allocation of bandwidth to shared channels 224 and dedicated channels 228 can be fixed, or can be managed. For example, either or both of shared channels 224a and 224b can have their allocated bandwidths increased, or
5 decreased, accordingly as the number of dedicated channels 228 increases or decreases and/or as the bandwidth allocated to another shared channel 224 is increased or decreased.

One reason for providing more than one shared channel 224 can include the ability to reduce transmission latency by reducing the length of the transmission frames and/or allowing multiple frames to be sent at the same time. For example, one shared channel 224 can
10 be dedicated to one group of service classes 60a and 60b, while a second channel can be dedicated to service class 60c. Another reason to employ more than one shared channel 224 is to provide an upgrade path whereby "old" subscriber stations 32 that cannot cope with an increased data rate or other new development can listen to one shared channel 224a which employs a suitable data rate or other needed technology and "new" subscriber stations 32 can listen to
15 another shared channel 224b which employs an increased data rate or other new technology.

Another reason for including more than one shared channel 224 is for security. A group of subscriber stations 32 which are to receive secured communications will listen to an encrypted shared channel 224a, while the balance of subscriber stations 32 listen to a non-encrypted shared channel 224b. While packets on the non-encrypted shared channel 224b can
20 have encrypted payloads, the entire frames of packets on the encrypted shared channel 224a can be encrypted, inhibiting traffic analysis to be performed on communications sent via channel 224a.

Yet another reason for providing more than one shared channel 224 can be that different subscriber stations 32 can have different abilities to receive the signals. Thus, one shared
25 channel 224 can have modulation, encoding and/or power level suitable for a service class or group of subscriber stations 32 which have good reception characteristics and a second shared channel 224 can employ a different modulation, encoding or power level suitable for another service class or group of subscriber stations 32 which have poorer reception characteristics.

The present invention is not limited to radio links or to other links employing
30 CDMA as a multiplexing technique. For example, the present invention can be employed for certain links operating on wired network or optical network physical layers and employing multiplexing techniques such as OFDM, TDMA, FDMA or hybrid multiplexing techniques.

-25-

The present invention provides a communication system and method which allows connection-like and connectionless communications to be provided in a manner which can make efficient use of available bandwidth and/or network resources. The system and method can be managed by the operator of a network to permit prioritization of some
5 communications over others and/or to vary bandwidth allocated between connection-like and connectionless communications as needed and/or desired.

The present invention provides a novel shared channel in a network having at least one base station and a plurality of subscriber stations. The shared channel can be composed of a plurality of frames having at least one packet that is readable by all subscriber
10 stations which indicates whether the receiving subscriber station is an intended addressee for all or part of the frame. The frame and/or portions thereof are robustly packaged in any appropriate manner, to ensure the intended addressee subscriber station(s) is capable of recovering any data addressed thereto, and that the unintended addressees subscriber stations are capable of
15 determining that they need not recover all or part of the data contained in the frame. By only robustly-packaging the frame, and/or portions thereof, according to different reception quality requirements of different subscriber stations, less complex packaging and/or packaging with less redundancy can be used for stations that have better reception qualities, thereby packaging more data into each frame, yet ensuring that the network is capable of reaching subscriber stations
20 having lower reception qualities by packaging the frame, or portions thereof, in a more robust (and complex) manner.

The above-described embodiments of the invention are intended to be examples of the present invention and alterations and modifications may be effected thereto, by those of skill in the art, without departing from the scope of the invention which is defined solely by the claims appended hereto.

25

APPENDIX 1

Ec/No (dB)	Spreading Factor (chips/symbol)	Modulation symbols	Coded bits/symbol	Code rate	Symbol Repetition Factor	Bit/symbol	Bits/frame	Es/No for 10 ⁻³ PER (dB)	Eb/No (dB)
-9.06	2	4	2	0.328	3	0.22	4198.4	-6.05	0.55
-8.81	2	4	2	0.357	3	0.24	4569.6	-5.8	0.43
-8.31	2	4	2	0.392	3	0.26	5017.6	-5.3	0.53
-7.56	2	4	2	0.435	3	0.29	5568	-4.55	0.83
-7.26	2	4	2	0.328	2	0.33	6297.6	-4.25	0.59
-7.01	2	4	2	0.357	2	0.36	6854.4	-4	0.47
-6.51	2	4	2	0.392	2	0.39	7526.4	-3.5	0.57
-5.76	2	4	2	0.435	2	0.44	8352	-2.75	0.87
-5.01	2	4	2	0.488	2	0.49	9369.6	-2	1.12
-4.51	2	4	2	0.556	2	0.56	10675.2	-1.5	1.05
-4.26	2	4	2	0.328	1	0.66	12595.2	-1.25	0.58
-4.01	2	4	2	0.357	1	0.71	13708.8	-1	0.46
-3.51	2	4	2	0.392	1	0.78	15052.8	-0.5	0.56
-2.76	2	4	2	0.435	1	0.87	16704	0.25	0.85
-2.01	2	4	2	0.488	1	0.98	18739.2	1	1.11
-1.51	2	4	2	0.556	1	1.11	21350.4	1.5	1.04
-0.51	2	4	2	0.646	1	1.29	24806.4	2.5	1.39
1.49	2	4	2	0.770	1	1.54	29568	4.5	2.62
4.49	2	16	4	0.435	1	1.74	33408	7.5	5.09
4.99	2	16	4	0.488	1	1.95	37478.4	8	5.10
5.74	2	16	4	0.556	1	2.22	42700.8	8.75	5.28
6.99	2	16	4	0.646	1	2.58	49612.8	10	5.88
8.74	2	16	4	0.770	1	3.08	59136	11.75	6.86
12.99	2	64	6	0.646	1	3.88	74419.2	16	10.12
15.24	2	64	6	0.770	1	4.62	88704	18.25	11.60
16.99	2	256	8	0.556	1	4.45	85401.6	20	13.52
17.99	2	256	8	0.646	1	5.17	99225.6	21	13.87
20.49	2	256	8	0.770	1	6.16	118272	23.5	15.60

We claim:

1. A communications structure for communicating between at least one network node and at least two subscriber stations through a multiple access link, said structure comprising:
a plurality of dedicated channels, each dedicated channel having allocated to it a portion of the transmission capacity of said link to provide communication between said network node and one of said at least two subscriber stations; and
a shared channel having allocated to it a portion of the transmission capacity of said link and wherein said shared channel is operable to transmit frames of packets from said network node to said at least two subscriber stations.
2. The structure according to claim 1 wherein said portion of the transmission capacity of said link allocated to said shared channel is fixed.
3. The structure according to claim 1 wherein said structure includes a preselected minimum number of said dedicated channels and said portion of the transmission capacity of said link allocated to said shared channel comprises the balance of said transmission capacity which is not occupied by said preselected number of said dedicated channels.
4. The structure according to claim 1 including at least two shared channels, each shared channel being operable to transmit frames of packets from said network node to said at least two subscriber stations.
5. The structure according to claim 4 wherein each of said at least two shared channels is operable to transmit said frames of packets to different ones of said at least two subscriber stations.
6. The structure of claim 4 wherein said balance of said transmission capacity is assigned unequally to each of said at least two shared channels.
7. The structure according to claim 3 wherein additional dedicated channels are created, when needed, by reassigning necessary transmission capacity of said link from at least one shared channels to such additional dedicated channels.

8. The structure according to claim 7 wherein said at least one shared channel has a preselected minimum transmission capacity and reassignment of transmission capacity from said at least one shared channel to said additional dedicated channels ceases before said transmission capacity assigned to said shared channels falls below said minimum transmission capacity.

9. The structure according to claim 1 wherein data for a subscriber station is transmitted from said network node via a combination of a dedicated channel and said shared channel, said dedicated channel providing a first data transmission rate and said shared channel providing an additional transmission rate, as needed, to accommodate transmission bursts in excess of said first data transmission rate.

10. The structure of claim 1 wherein at least one of said plurality of dedicated channels has a different amount of said transmission capacity allocated to it than does another of said plurality of dedicated channels.

11. The structure of claim 1 wherein said link is a radio link.

12. The structure of claim 11 wherein said radio link employs CDMA as a multiple access technique.

13. A method of transmitting data from a network node to a plurality of subscriber stations over a multiple access link, comprising the steps of:

(i) determining the requirements for a first data transmission intended for a subscriber station;

(ii) selecting the use of a dedicated channel or a shared channel to effect said first data transmission in accordance with said determined requirements; and

(iii) if a dedicated channel is selected, obtaining a dedicated channel when available and transmitting said first data transmission thereon and if a shared channel is selected, transmitting said first data transmission on said shared channel in the form of data packets addressed to said subscriber station.

-29-

14. The method of claim 13 wherein the determination in step (i) is made in consideration of the QoS requirements of said first data transmission.
15. The method of claim 13 wherein the determination in step (i) is made in consideration of the type of data to be transmitted.
16. The method of claim 13 wherein, if a dedicated channel is selected and no such dedicated channel is available, said first data transmission is transmitted on said shared channel.
17. The method of claim 13 where in step (ii), both a dedicated channel and a shared channel are selected, an amount of said first data transmission corresponding to the transmission capacity of said dedicated channel being sent thereon and the balance of said first data transmission being sent on said shared channel.
18. A system for transmitting data comprising:
 - a network node having an output device for outputting a signal;
 - a plurality of subscriber stations each having an input device and being operable to a receive said signal at a different reception quality than at least one other said subscriber station;
 - said signal including a frame having an identifier recoverable by all of said subscriber stations regardless of said reception qualities, and a remaining portion recoverable by at least one of said subscriber stations, said identifier indicating whether said subscriber station need recover said remaining portion.
19. The system according to claim 18 wherein said output device is a radio and said input device is a radio and said signal is a wireless transmission.
20. The system according to claim 18 wherein said signal is transmitted over a CDMA channel.
21. The system according to claim 18 wherein said identifier indicates a range of reception qualities and said remaining portion includes a header having address information, said header being recoverable by said subscriber stations within said range, said remaining portion further

-30-

including at least one payload packet being recoverable by a subscriber station corresponding to said address information.

22. The system according to claim 19 wherein said payload packet is packaged according to an addressee subscriber station's reception quality.

23. The system according to claim 18 wherein said reception quality is a measurement of signal-to-noise ratio.

24. The system according to claim 18 wherein said identifier is packaged into said frame using a modulation operation.

25. The system according to claim 18 wherein said identifier is packaged into said frame using an encoding operation.

26. The system according to claim 18 wherein said remaining portion is packaged into said frame using a modulation operation.

27. The system according to claim 18 wherein said remaining portion is packaged into said frame using a combination of an encoding operation and a modulation operation.

28. The system according to claim 27 wherein said encoding operation is rate $1/N$ convolutional encoding and N equals at least two.

29. The system according to claim 28 wherein the result of said encoding operation is punctured.

30. The system according to claim 27 wherein said modulation operation is M -ary QAM.

31. The system according to claim 18 wherein said remaining portion is packaged into said frame using an encoding operation.

-31-

32. A system for transmitting data comprising:
a network node;
a first subscriber station and being operable to receive a transmitted radio signal from said network node at a first reception quality;
at least one additional subscriber station operable to receive said transmitted radio signal at a second reception quality different from said first reception quality;
said network node operable to robustly-package a frame of data over a channel for reception by all of said subscriber stations, wherein a portion of said frame is recoverable by all of said subscriber stations to indicate whether a receiving subscriber station is intended to recover a remaining portion of said frame.
33. A subscriber station comprising:
means for receiving a radio-signal at a reception quality, said radio-signal carrying a frame transmitted from a network node;
means to recover an identifier from said frame regardless of said reception quality, said identifier indicating whether said subscriber station should recover a remaining portion of said frame that is packaged according to said reception quality.
34. A frame for transmission to a plurality of subscriber stations each having a reception quality corresponding to an ability to recover said transmission, said frame comprising:
an identifier packaged for recovery regardless of said reception qualities and including information representing whether a receiving subscriber station is within a range of reception qualities;
a header packaged for recovery by subscriber stations within said range and including address information; and,
at least one payload packet packaged for recovery by subscriber stations in accordance with said address information.
35. A method of packaging a frame for transmission to at least one of a plurality of subscriber stations over a multiple-access link, each of said subscriber stations having a reception quality associated with an ability to receive a transmission over said link, said method comprising the steps of:

-32-

receiving and buffering a sufficient amount of data to fill said frame;

assembling said data into at least one payload packet addressed to said at least one subscriber station, said at least one payload packet being robustly-packaged according said at least one subscriber station's reception quality;

assembling an address of said at least one subscriber station into a header packet that is robustly-packaged at least according said at least one subscriber station's reception quality;

assembling an identifier indicating the poorest reception quality of the at least one subscriber stations having said at least one payload packet addressed thereto, said identifier being recoverable by all subscriber stations regardless of said reception qualities;

assembling said payload packets, said header and said class-identifier into a frame; and transmitting said frame over said link.

36. A method of recovering a frame transmitted from a network node to a plurality of subscriber stations over a multiple-access link, each of said subscriber stations having a reception quality associated with said multiple-access link, said method comprising the steps of:

receiving said transmitted frame;

recovering an identifier using a recovery operation corresponding to a lowest reception quality of said subscriber stations;

recovering a header when said identifier indicates that said receiving subscriber station is within a range of reception qualities, said header packet recovered using a recovery operation corresponding to a lowest reception quality indicated by said identifier packet; and

recovering payload packets when said header packets indicate that said payload packets are addressed to said receiving subscriber station, said payload packet recovered using a recovery operation corresponding to a reception quality of said receiving subscriber station.

37. A frame for transmission to a plurality of subscriber stations each having a reception quality corresponding to an ability to recover said transmission, said frame comprising:

an identifier packaged for recovery regardless of said reception qualities and including information representing whether a receiving subscriber station is within a range of reception qualities;

a header packaged for recovery by subscriber stations within said range and including address information; and

at least one payload packet packaged for recovery by subscriber stations in accordance with said address information.


38. The frame according to claim 37 wherein said identifier is packaged for recovery according to an error rate one order of magnitude lower than a target error rate for said frame.

39. A communications structure for communicating between at least one network node and at least two subscriber stations through a multiple access link, said structure comprising:

a plurality of dedicated channels, each dedicated channel having allocated to it a portion of the transmission capacity of said link to provide communication between said network node and one of said at least two subscriber stations;

a shared channel having allocated to it a portion of the transmission capacity of said link and wherein said shared channel is operable to transmit frames of packets from said network node to said at least two subscriber stations; and

wherein at least one of said dedicated channels or said shared channel employs a modulation and/or encoding method for transmissions to a subscriber station which is selected according to the reception quality of said subscriber station, said modulation and/or encoding method differing from a modulation and/or encoding method for transmissions to another subscriber station with a different reception quality.

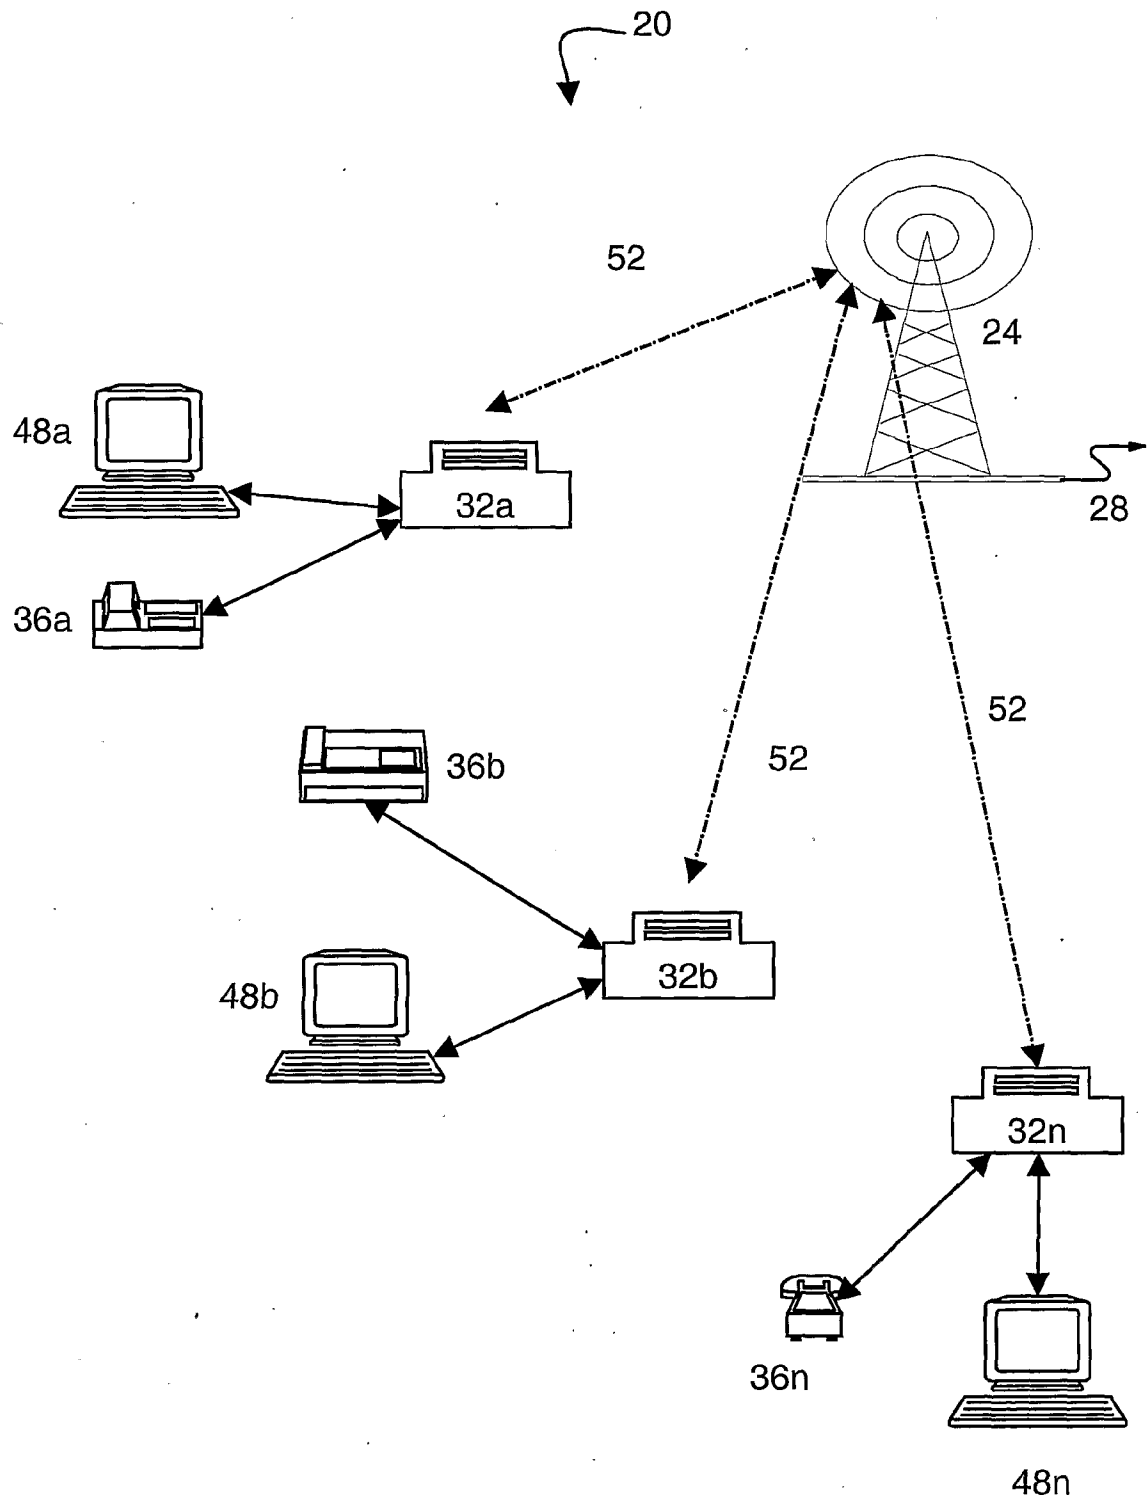1/7**Fig. 1**

2/7

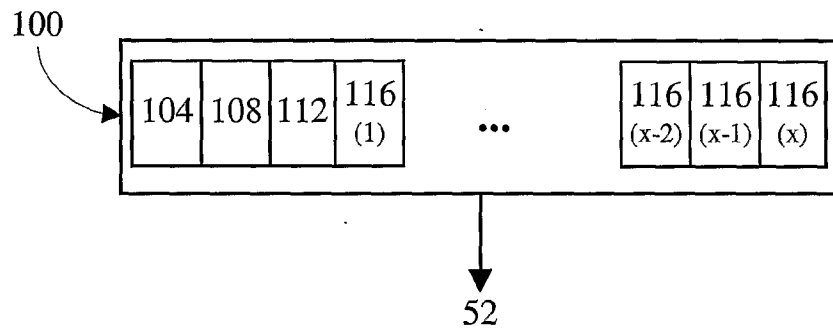


Fig. 2
(Prior art)

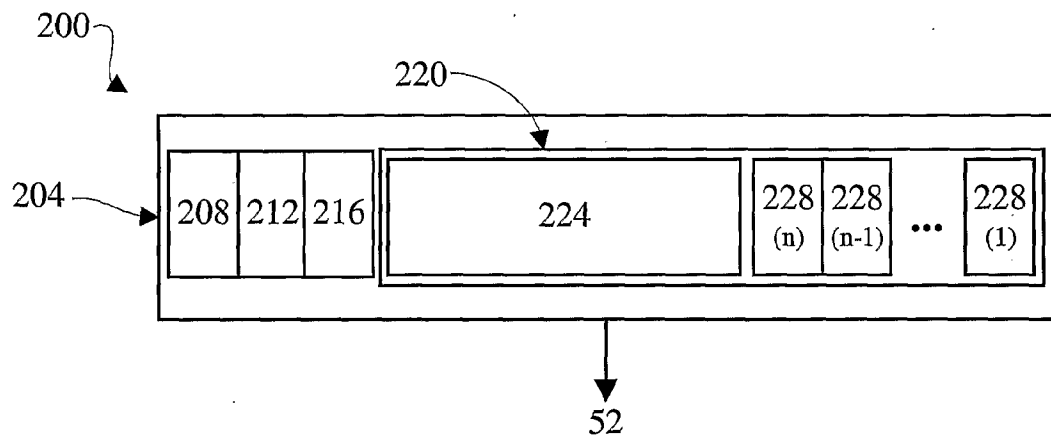
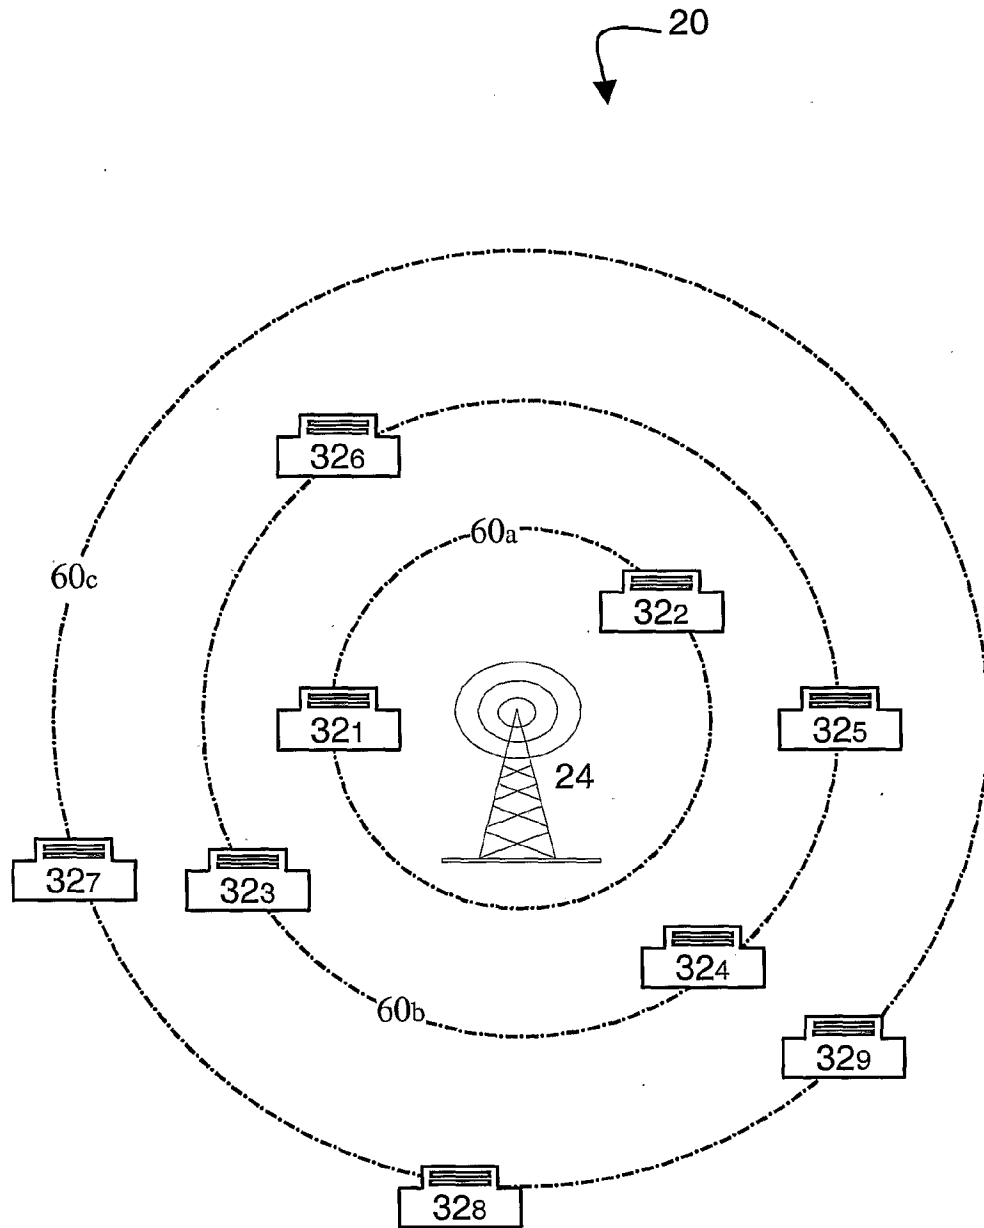


Fig. 3

3/7**Fig. 4**

4/7

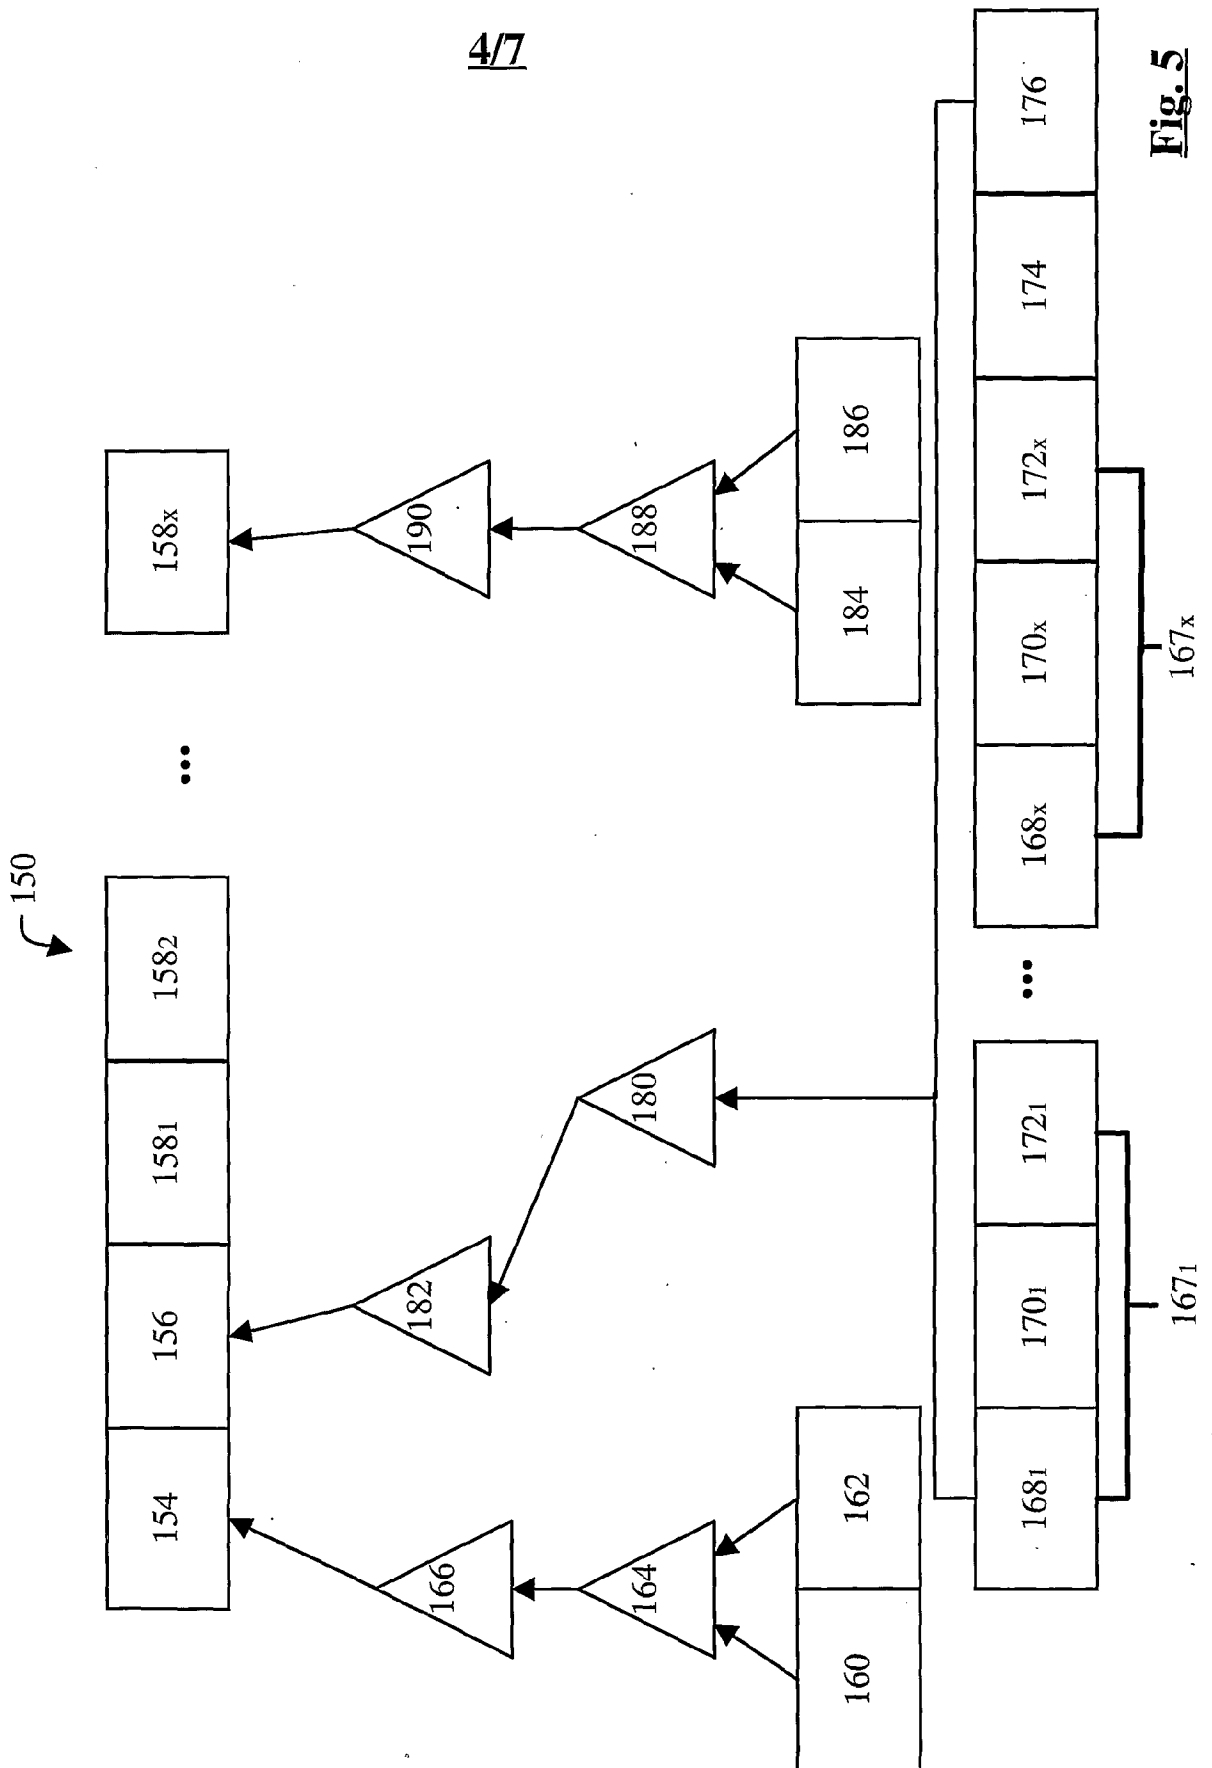


Fig. 5

5/7

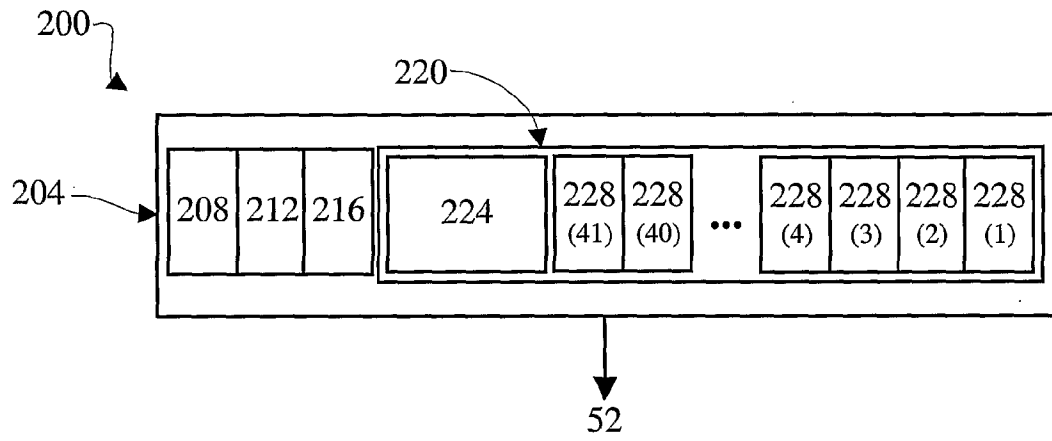


Fig. 6a

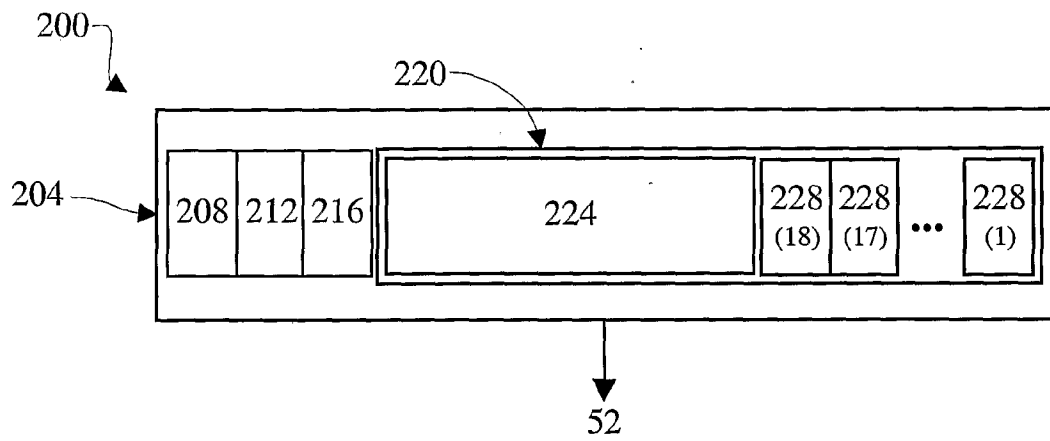


Fig. 6b

6/7

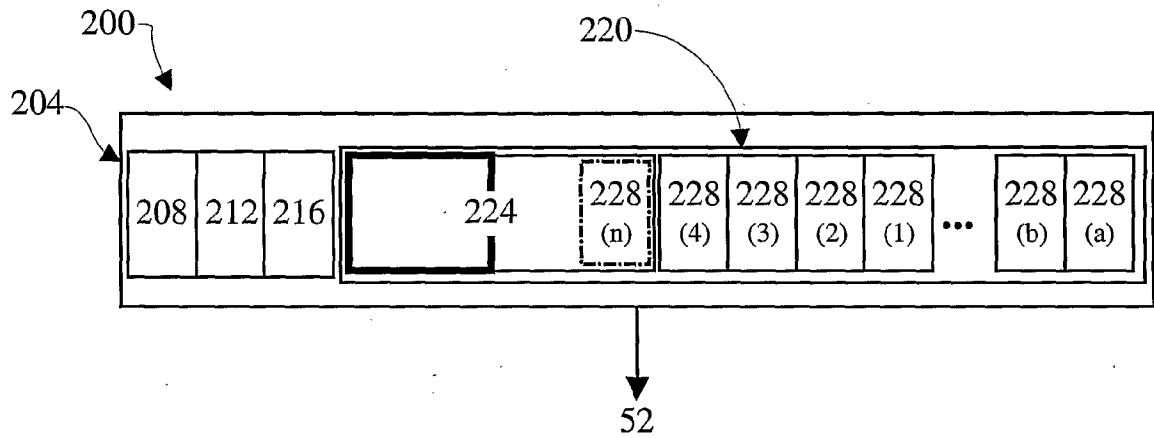


Fig. 7a

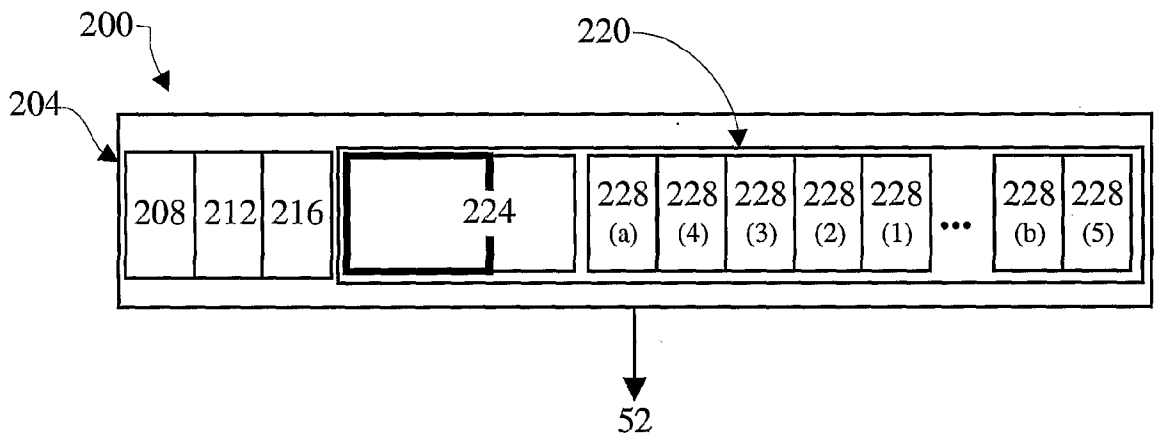


Fig. 7b

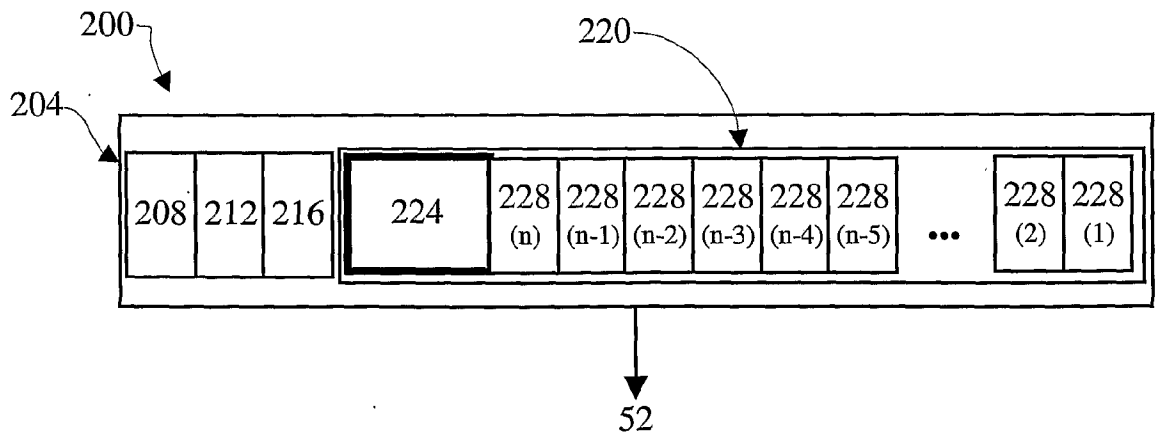
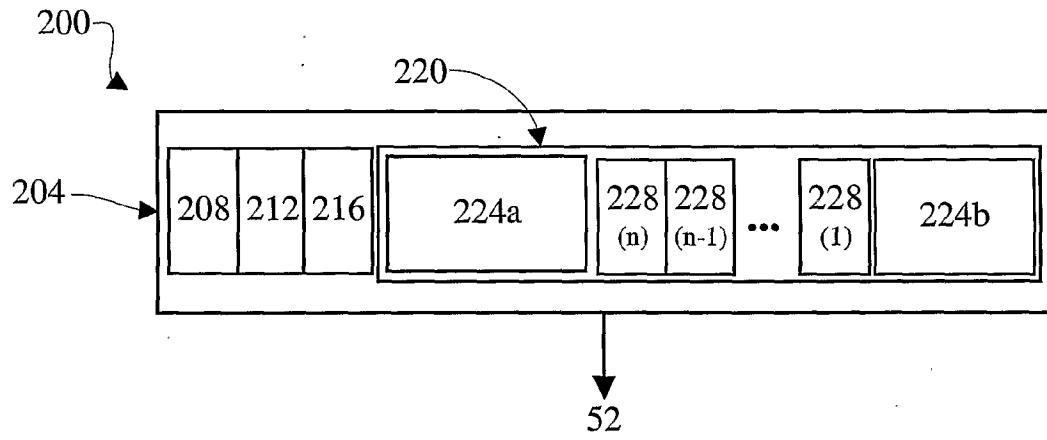


Fig. 7c

7/7**Fig. 8**